
CONNECTION DIAGRAM OF CONTROL UNIT :-




- 1. Open cover to reach battery pack
- 2. Use only 4xAA size alkaline batteries
- 3. Screw back cover properly to avoid water leakage
- Please use "Duracell" alkaline
 batteries or equivalents, do not use
 different batteries together
- 5. It will work on either of power mode alone. When both power modes connected, it will work on AC & on power failure will switch to DC automatically

LIGHT NOTIFICATION

HOW TO CLEAN THE STRAINER





ROUTINE CARE AND MAINTENANCE



CUSTOMER SUPPORT:-

AFTER-SALES SERVICE

Our Customer Support Team is comprehensively trained to provide help and advice, spare parts or a service visit. **SPARE PARTS**

We maintain an extensive stock of spares and aim to have functional parts available for ten years from the date of final manufacture of the product. Spares can be purchased from approved stockists or merchants (locations on request) or direct from our Customer Support Department. Spares direct will normally be dispatched within two working days.

In the interest of safety, spares requiring exposure to mains voltages can only be sent to qualified persons. **SERVICE**

Our Customer Support Team is available to provide quality service at a reasonable cost. You will be assured of the services of a trained engineer I agent, genuine spares and a 3-month warranty on the repair.

A PRODUCT PROUDLY DESIGNED & MANUFACTURED IN INDIA



AUTOMATIC SENSOR FAUCET

(Wall Mounted)




INSTALLATION & OPERATION MANUAL


- 1. Designed and manufactured in India to automatically wash hands without the need to touch the tap.
- 2. An essential and dependable component in every washroom to maintain proper hygiene.
- 3. Simultaneously instrumental to help reduce water wastage.
- 4. Prevents the spread of germs due to physical contact of tap.
- 5. Ensures no one leaves the tap running after use as water flows only for the duration when hand is in front of the sensor.
- 6. A true Indian product that confirms to Green Building Standards.
- 7. Reduces carbon footprint & saves considerable amount of operational costs as compared to Manual Taps.

SPECIFICATIONS :-

MODEL	BP-F077
POWER	6V DC/ 220V AC
SENSING RANGE	150mm Adjustable
WATER PRESSURE	0.02 MPa - 0.8 Mpa *0.05 Mpa is minimum required pressure for decent flow of water
INLET	G1/2" (Dn15)
SETTINGS	Sensing range adjustment pot given at control unit By default range is preset at optimum value Alter setting only if necessary

INSTALLATION DIAGRAM:-

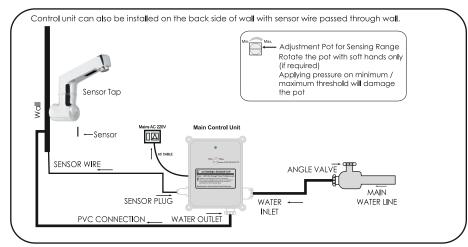



Water is Precious, Hygiene is Prime Care for Water, Care for Yourself

Dear Users:

We thank you for your selection of our company products. Please contact our customer care in case of any trouble. We are always eager to assist you.

Automatic Sensor Faucet Troubleshoot Flowchart

